

The Reliable Brand



Sanitary Stainless Steel 3Pcs Ball Valves

3PCS-FERRULE

- Lever Operation(PAD)
- For On - Off Service
- Bore design - Full bore
- The rigid coupling ball to prevent leakage of the sheet (PTFE)
- Easy integration detachable fixing pad





SPECIFICATIONS


Actuator Type	-
Operating media	-
Operating Pressure	-
Rotating Angle	-
Fluid temperature	0 ~ 120°C
Pressure Range	10kgf/cm ²
Accessory	Limit Switch Box
	Actuator

Part	MATERIAL
Body	SUS 304 / 316
Ball	SUS 304 / 316
stem	SUS 304 / 316
Ball seat	PTFE
Stem packing	PTFE
End connection	FERRULE


DIMENSIONS

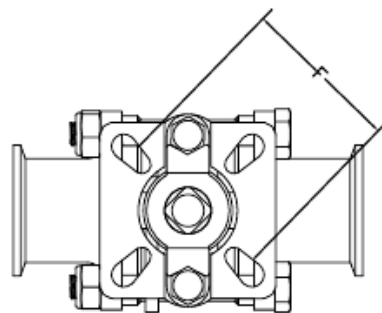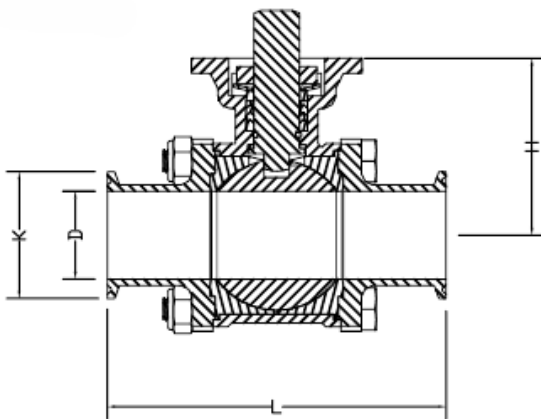


Valve Size	K	D	L	H	F	KG
1S	50.5	22	116	55	F04 / F05	1.1
1.5S	50.5	35	135	70	F05 / F07	1.9
2S	64	48	152	76	F05 / F07	2.8
2.5S	77.5	59	180	93	F05 / F07	5.18
3S	91	72	178	93	F05 / F07	5.35
4S	119	98	245	135	F07 / F10	13.5

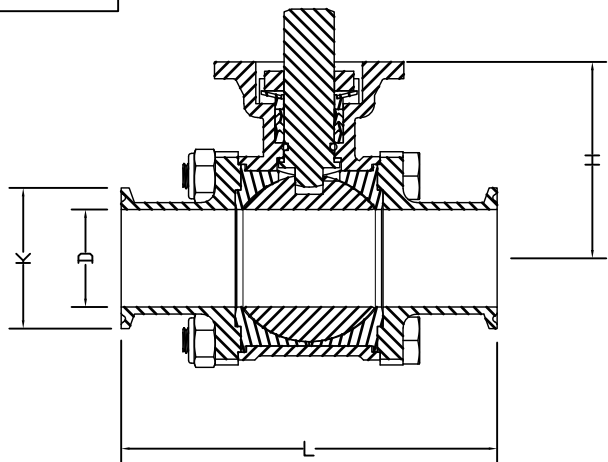

Q81F-10P						
SIZE	K	D	L	H	F	KG
1S	50.5	22	116	55	F04/F05	1.1
1.5S	50.5	35	135	70	F05/F07	1.9
2S	64	48	152	76	F05/F07	2.8
2.5S	77.5	59	180	93	F05/F07	5.18
3S	91	72	178	93	F05/F07	5.35
4S	119	98	245	135	F07/F10	13.5



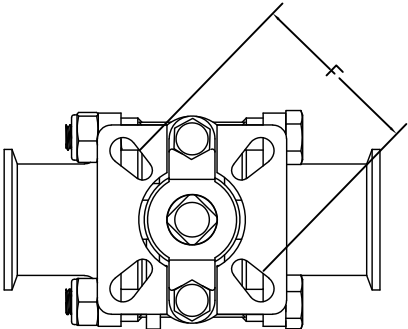


14	Screw	304
13	Gland	304
12	Metal laminated ring	304
11	Flat cushion	304
10	V-shaped packing	PTFE
09	Flat cushion	PTFE
08	Valve stem	304
07	O-ring	FKM
06	Nut	304
05	Valve body	CF8
04	Valve ball	304
03	Screw	304
02	Valve seat	PTFE
01	Valve deck	CF8
N0.	Parts name	Materral

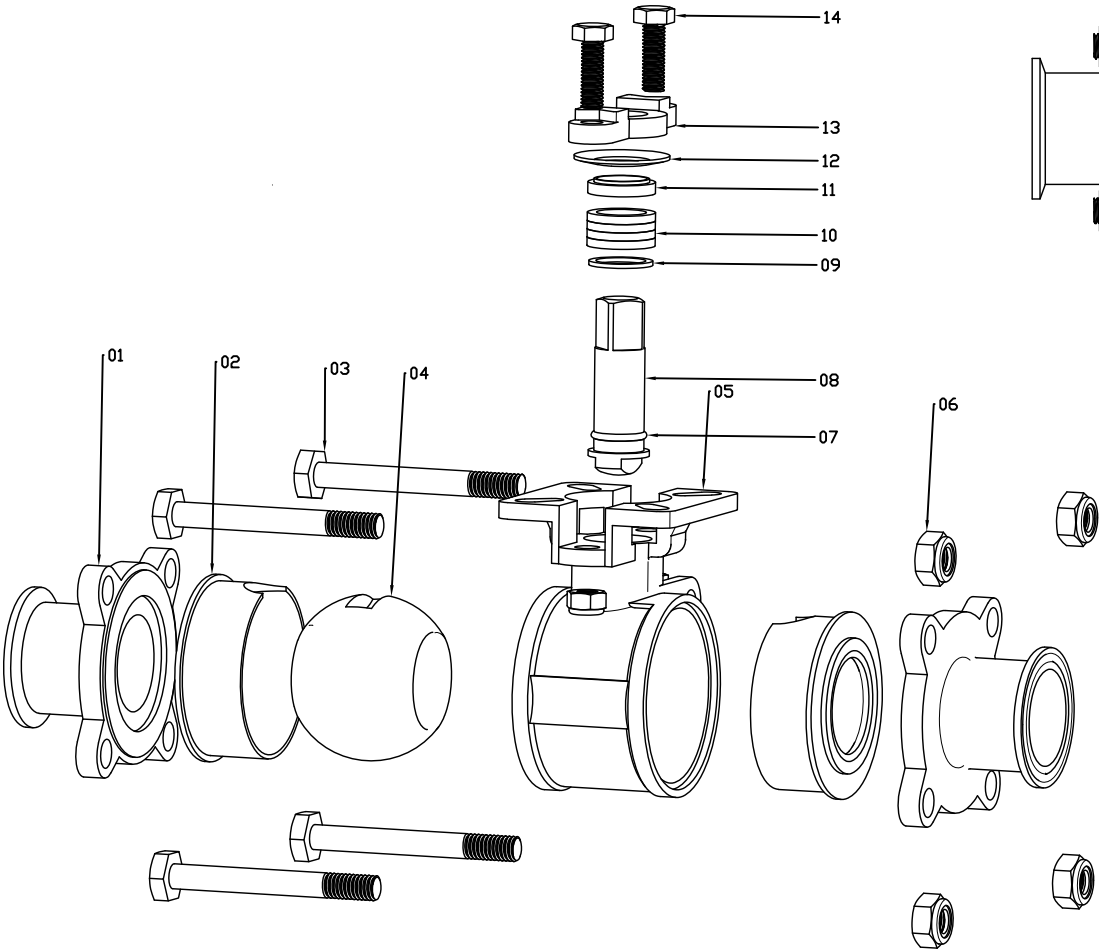

Temperature	0-120℃					BALL VALVE		
Applicable pressure	-0.05-1.0MPa							

Q81F-10P			
SIZE	K	D	L
1"	50.5	22	116
1 1/2"	50.5	35	135
2"	64	48	152
2 1/2"	77.5	59.5	180
3"	91	72	178

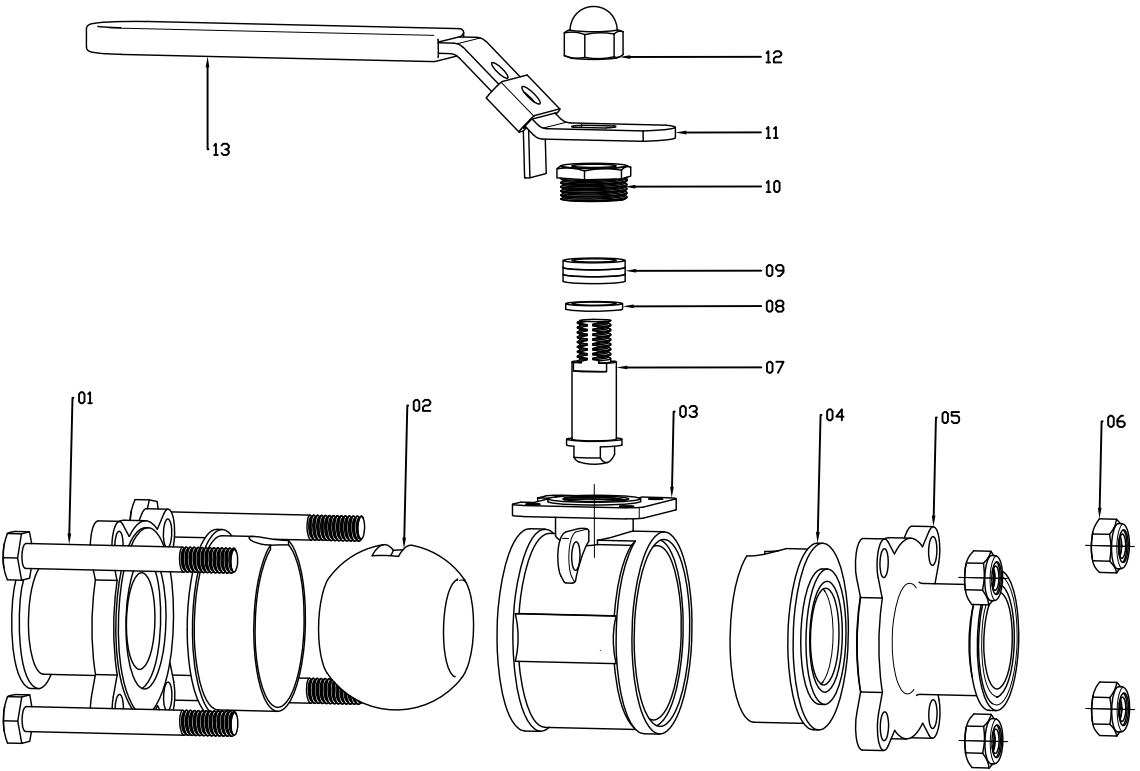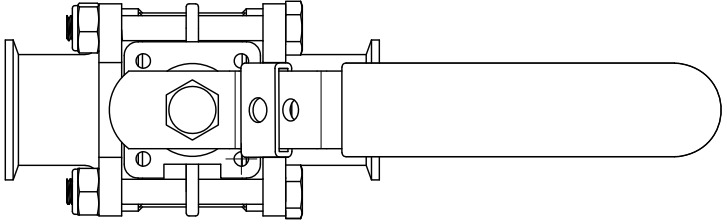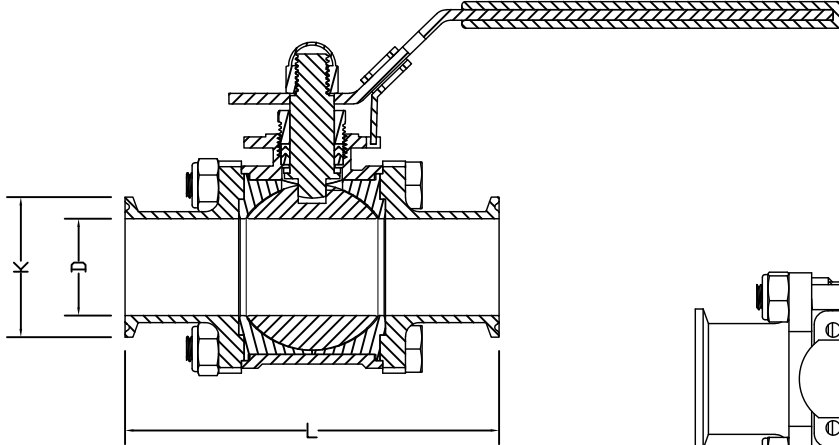

12	Nut	304
11	Handle	304
10	Gland	304
09	V-shaped packing	PTFE
08	O-ring	FKM
07	Valve stem	304
06	Nut	304
05	Valve deck	CF8
04	Valve seat	PTFE
03	Valve body	CF8
02	Valve ball	304
01	Screw	304
NO.	Parts name	材质 Material

Temperature	0-120℃					3PC		
Applicable pressure	-0.05-1.0MPa						BALL VALVE	